



▶ Zerust® Axxatec™ 8110C Additive


Zerust®/Excor® Axxatec™ 8110 is an easy-to-use corrosion inhibiting additive that contains proven Zerust ICT® (Integrated Corrosion Technologies). Axxatec 8110 is designed for use in enclosed systems: fire extinguishing water systems, coolant systems such as water based hydraulic systems, heat exchangers and will be protected for two years.

Zerust® Axxatec™ 8110 protects interior surfaces and parts comprised of iron, steel, aluminum, copper and brass within closed systems. Axxatec 8110 is water-based and easily diluted with coolant or water-based hydraulic fluids. Use Zerust Axxatec 8110 to prevent corrosion in closed systems for up to two years. It is a water-based concentrate that can be added to fluids such as hydraulics and coolants.

In addition, Axxatec 8110 will provide a few hours of corrosion protection when used as a coating or final rinse for parts that will be enclosed in Zerust/Excor VCI Packaging Film. Axxatec 8110 helps prevent flash rust in-between production processes, but is not recommended as a long-term or stand-alone external corrosion protection coating. Check with your Zerust/Excor representative for a corrosion management system most effective for your metal assets.

Application Example

Fire extinguishing water systems can be protected by Axxatec 8110 during downtime.

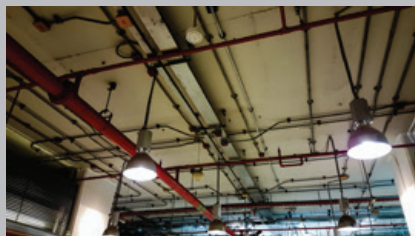

▶ Benefits

- Proven corrosion protection
- Protects multiple metal types
- Water-based concentrate
- Non-hazardous*

Application Type

- Storage
- Work in progress

*Non-Hazardous Disposal: Product in unopened original container prior to use is non-hazardous waste in the United States according to 40 CFR 261 (no components listed on F, K, P or U lists; not ignitable, not corrosive, not reactive and not toxic).



Specifications

Product Information	Zerust®/Excor® Axxatec™ 8110 is a water-based additive.	
Properties	Appearance	Light yellow liquid
	Removability	Deionized water
	pH	Approx. 6.8 - 7.8
Protection Info	Closed system	Up to 2 years
	Packaging/hermetically sealed	Up to 5 years
	Metal types	Ferrous, aluminum, copper and brass
Storage	Temp	50 to 90°F (10 to 32°C)
	Duration	Up to 2 years
Disposal	Dispose of in accordance with local, national and international regulations.	
Dilution	1 part Axxatec 8110 to 10 parts water.	

Availability

Zerust® Axxatec™ 8110C is sold as a concentrate.

Part Number	Quantity
350-M-00005PL	5 Gal pail
350-M-00005DR	55 Gal drum

Health and Safety

Non-Hazardous Disposal: Product in unopened original container prior to use is non-hazardous waste in the United States according to 40 CFR 261 (no components listed on F, K, P or U lists; not ignitable, not corrosive, not reactive and not toxic).

Warranty and Disclaimer Information: We guarantee our products conform to documented quality specifications. Product information subject to change without notice. We make no warranty of any kind expressed or implied as to the effects of use (including, but not limited to, damage or injury). For full warranty and disclaimer information visit, www.zerust.com/warranty.

©2015 Northern Technologies International Corporation (NTIC). All Rights Reserved. NTIC is the owner of the following trademarks: ActivPak®, Cor-Tab®, EXCOR®, Flange Saver®, ICT®, NTI®, Plastabs®, Z-CIS®, Zerion®, ZERUST®, The ZERUST People®, and the Color "Yellow". ABRIGO®, UNICO®, and VALENO® are registered trademarks of EXCOR GmbH, a Joint Venture Partner of NTIC.

Contact Us



A product of:
Northern Technologies
International Corp
4201 Woodland Road
Circle Pines, MN 55014
USA

Phone. +1 763.225.6600
Fax. +1 763.225.6645
sales@zerust.com
www.zerust.com